


### AGILIS TRADITIONAL BAFFLES



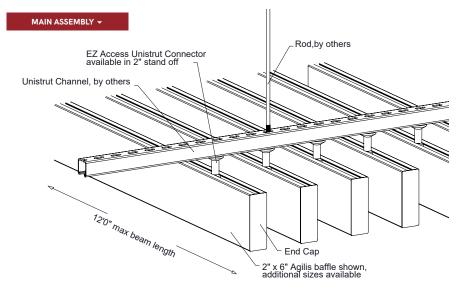





#### PHYSICAL DATA

- Material substrate Aluminum | Fabricated
- Thickness .041" .060" design dependent
- Fire Performance Class A: Tested per ASTM E84. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.
- Weight Varies from .67 1.10 lbs./ln.ft.
- Warranty One Year Limited
- Surface Finish Factory-applied polyester paint. Available in Standard Colors, Color Matched and Wood Look Powder-Coated
- Seismic areas Agilis has been engineered for use in all seismic areas. Installations may require additional attachment from baffle to suspension bar. Check with local code officials or a licensed engineer for additional requirements.
- Acoustical Options Perforated panels are supplied with acoustic infills to absorb sound -NRC values include .60, .70, .90, .95, 1.0, 1.1

■ No VOC'S: No added urea-formaldehyde

LEED® is a registered trademark of the U.S. Green Building Council

■ FSC chain of custody veneers available

■ Recycled Content - up to 85%

#### SUSTAINABILITY

#### CONTRIBUTES TO LEED® POINTS -

- LEED BD+C: New Construction v4
- ▶ MR: Regional Materials
- ▶ MR: Recycled Content
- LEED BD+C: Schools v4
- ▶ EQ: Acoustic Performance
- LEED ID+C: Commercial Interiors v4
- ▶ EQ: Low-Emitting Material

#### FEATURES

- Create on trend linear designs
- Unlimited finish options custom colors, wood looks, films & wood veneers
- 16 standard wood look finishes
- Custom sizes & shapes At Maxxit custom is what we do best. We will make any shape or size you can design.
- Standard sizes in addition to custom we also have quick ship standard products available made to order
- Lengths up to 12'
- Depths up to 15"
- ▶ Widths up to 24″
- Quick ship and expedited shipping
- Available in acoustic perforated styles
- Lightweight, pre-assembled & easy to install
- Versatile attachment options for Unistrut, 15/16" HD Grid and Cable hung applications
- Easy plenum access attachment hardware allows baffles to slide for easy plenum access and adjustment during installation
- Cleanable using CDC recommended and EPA-approved disinfectants for fog, spray & wipe
- Integrated lighting options available



### **AGILIS** | TRADITIONAL BAFFLES

## OOK FINISHES

#### Standard Powder Coated Paint Finishes (Interior & Exterior) Formaldehyde-Free



Chestnut











FIND YOUR PERFECT MATCH

National Walnut



Maple





Teak

Standard Laminated (Film) Finishes (interior only). Formaldehyde-free














**Custom Colors** 


COLOR & FINISHES

Maxxit powder coat finishes offer superior chemical, scratch and UV resistance, they do not emit VOC's and are available in a broad range of textures, glosses and specialty looks.


#### **Standard Colors**
















**White Finishes** 








**Custom Colors** 



### PERFORATIONS

#### Perforation Options (Additional perforations available upon request.)



Unperforated



#2 Straight Open area 2% Centers 0.1968″ Diameter 0.032″



#3 Straight Open area 2.10% Centers 0.3788″ Diameter 0.0625″




#4 Straight Open area 4.90% Centers 0.5″ Diameter 0.125″



#6 Straight Open area 6.50% Centers 0.5412″ Diameter 0.1562″



#8 Staggered Open area 8.0% Centers 0.306" Diameter 0.098"



#9 Staggered Open area 9.80% Centers 0.3536" Diameter 0.125"




#12 Staggered Open area 13.40% Centers 0.1624″ Diameter 0.0625″




#13 Straight Open area 13.40% Centers 0.3789" Diameter 0.1562"



#14 Straight Open area 14.70% Centers 0.2706" Diameter 0.117"




# 16 Straight Open area 16.0% Centers 0.216" Diameter 0.098"




#17 Straight Open area 17.10% Centers 0.2012″ Diameter 0.0938″



#18 Straight Open area 17.50% Centers 1.1908" Diameter 0.5652"



#19 Straight Open area 19.60% Centers 0.25" Diameter 0.125"



#20 Staggered Open area 20% Centers 0.197″ Diameter 0.071°



#22 Staggered Open area 22.70% Centers 0.25″ Diameter 0.125″




#23 Staggered Open area 23.0% Centers 0.160" Diameter 0.063"



#29 Straight Open area 29.50% Centers 0.256" Diameter 0.157"

# M

## **AGILIS DESIGNS**

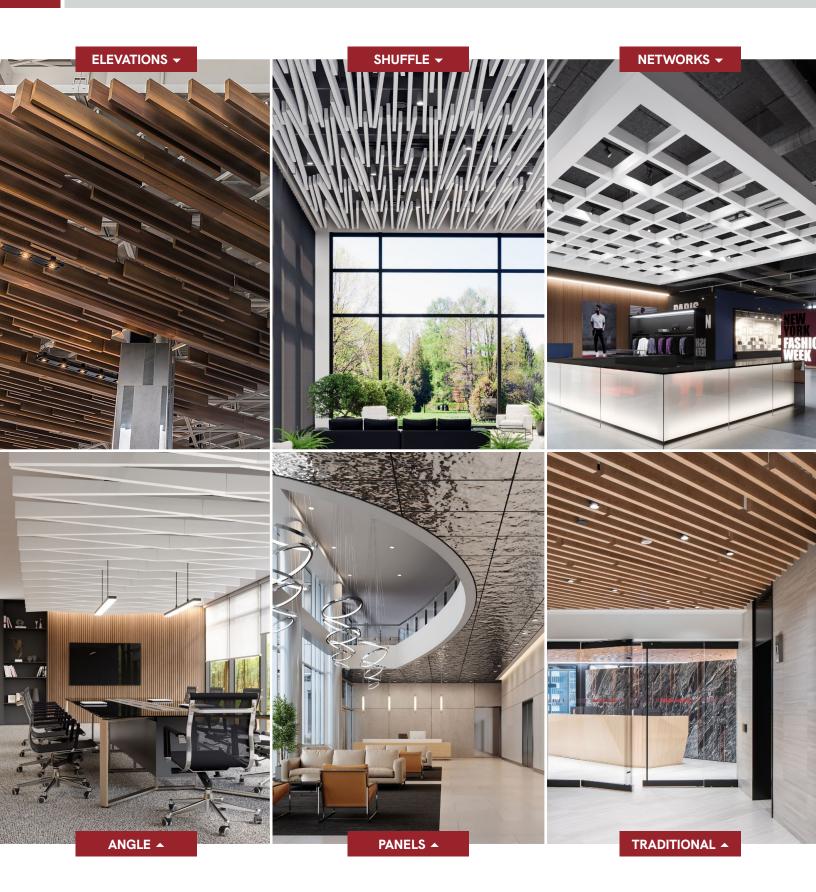



# DESIGN REALIZED

From the familiar to the truly one of a kind, Maxxit brings your design vision to life. With ceilings and walls crafted from Wood, Felt, Metal, Composites & more there is no limit to what we can create together.













