

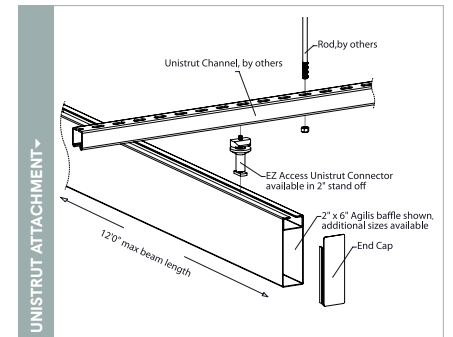


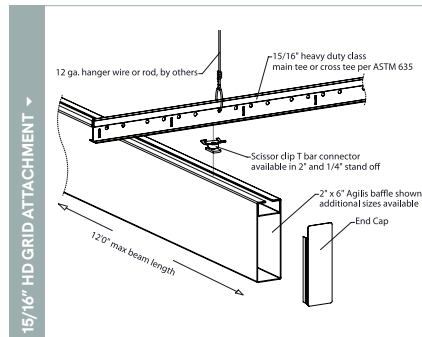

MAIN ASSEMBLY ▾

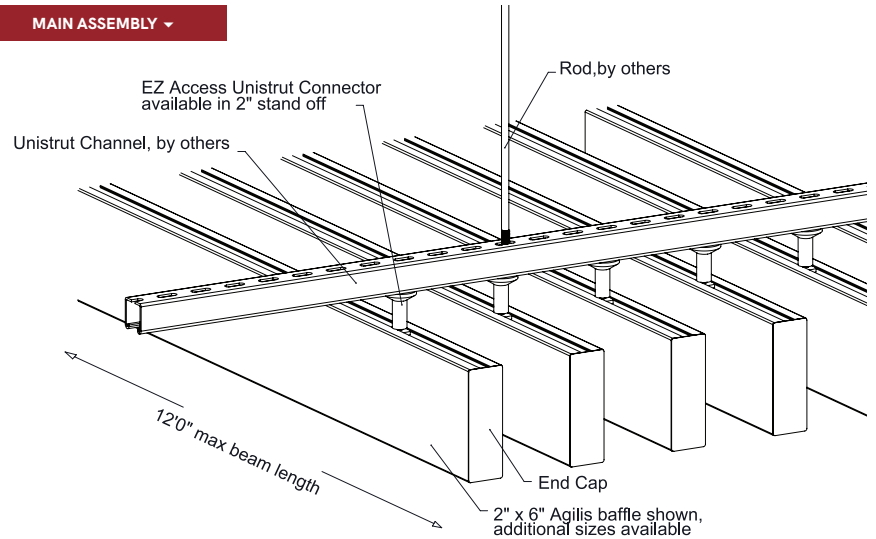

PHYSICAL DATA

- Material substrate - Aluminum | Fabricated
- Thickness .041" - .060" design dependent
- Fire Performance - Class A: Tested per ASTM E84. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.
- Weight - Varies from .67 - 1.10 lbs./ln.ft.
- Warranty - One Year Limited
- Surface Finish - Factory-applied polyester paint. Available in Standard Colors, Color Matched and Wood Look Powder-Coated.
- Seismic areas - Traditional Baffles have been engineered for use in all seismic areas. Installations may require additional attachment from baffle to suspension bar. Check with local code officials or a licensed engineer for additional requirements.
- Acoustical Options - Perforated panels are supplied with acoustic infills to absorb sound - NRC values vary based on design and application.

SUSTAINABILITY

LEED CONTRIBUTION -

- LEED BD+C v4 (MR: Regional & Recycled Materials).
- Schools EQ: Acoustic Performance.
- ID+C EQ: Low-Emitting Materials.
- No VOCs.
- EPD available.
- Aluminum contains up to 80% recycled content.

LEED® is a registered trademark of the U.S. Green Building Council

FEATURES

- Create on trend linear designs.
- Unlimited finish options - custom colors, wood looks, films.
- Custom sizes & shapes - At Maxxit custom is what we do best. We will make any shape or size you can design.
- Standard sizes - in addition to custom we also have quick ship standard products available made to order.
 - ▶ Lengths - up to 12'
 - ▶ Depths - up to 15"
 - ▶ Widths - up to 24"
- Quick ship and expedited shipping.
- Available in acoustic perforated styles.
- Lightweight, pre-assembled & easy to install.
- Versatile attachment options for Unistrut®, 15/16" HD Grid and Cable hung applications.
- Easy plenum access - attachment hardware allows baffles to slide for easy plenum access and adjustment during installation.
- Cleanable using CDC recommended and EPA-approved disinfectants for fog, spray & wipe.
- Integrated lighting options available.

WOOD LOOK FINISHES


Standard Powder Coated Paint Finishes (Interior & Exterior) Formaldehyde-Free



Custom Colors


FIND YOUR PERFECT MATCH

At Maxxit we have a passion for finishes; wood, metallic, oil rubbed, whatever your challenge is we can match it!



Send us a color sample so we can quickly provide a color match.

Standard Laminated (Film) Finishes (Interior only). Formaldehyde-free

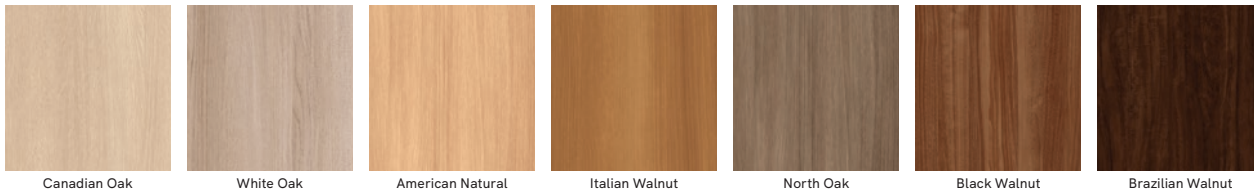

STANDARD COLORS

Maxxit powder coat finishes offer superior chemical, scratch and UV resistance, they do not emit VOC's and are available in a broad range of textures, glosses and specialty looks.

Powder Coated Paint Finishes (Interior & Exterior) Formaldehyde-Free



Custom Colors



Custom colors available


Powder Coated, Bonded Metallic Finishes (Interior & Exterior) Formaldehyde-Free




PERFORATIONS

Perforation patterns may be limited or not available for some product styles and designs. Perforation border size varies based on product style, size, and perforation pattern. For specific details, please reach out to your Maxxit representative.


Standard Perforations Angles - Staggered 60°




Unperforated




S02 Staggered
Diameter 0.0625
Open area 4.50%
Centers 0.2812




S03 Straight
Diameter 0.125
Open area 4.90%
Centers 0.5



S04 Staggered
Diameter 0.125
Open area 9.90%
Centers 0.3788




S05 Staggered
Diameter 0.0625
Open area 10.10%
Centers 0.1875




S06 Straight
Diameter 0.125
Open area 19.60%
Centers 0.25


Premium Perforations Angles - Diagonal 45° | Staggered 60°




P11 Straight
Diameter 0.0625
Open area 2.10%
Centers 0.3788




P12 Straight
Diameter 0.098
Open area 4.14%
Centers 0.427




P13 Diagonal
Diameter 0.098
Open area 8.28%
Centers 0.3019




P14 Diagonal
Diameter 0.078
Open area 26.53%
Centers 0.1898



P18 Staggered
Diameter 0.125
Open area 22.70%
Centers 0.25



P19 Staggered
Diameter 0.0625
Open area 22.70%
Centers 0.125



P21 Straight
Diameter 0.098
Open area 16.55%
Centers 0.2135





LINE:Form™ DESIGNS


ANGLE BAFFLES ▶
Felt, Profile




ANGLE BAFFLES ▶
Metal




ELEVATIONS BAFFLES ▶
Felt




ELEVATIONS BAFFLES ▶
Metal

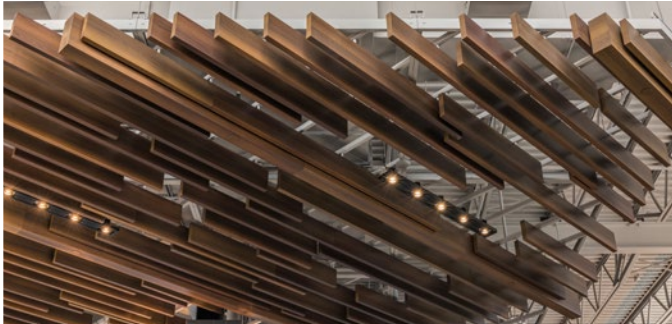


EXTERIOR WALL FINIS ▶

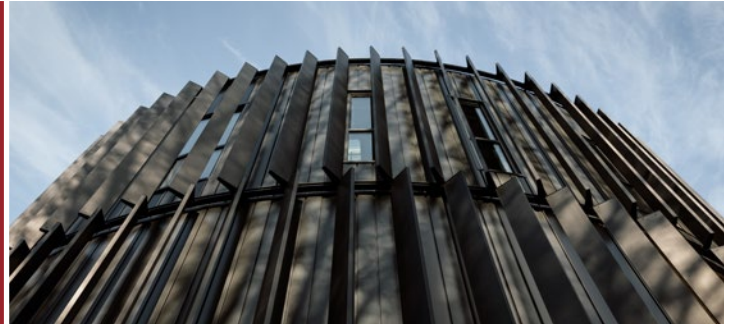


LINEAR PLANKS ▶

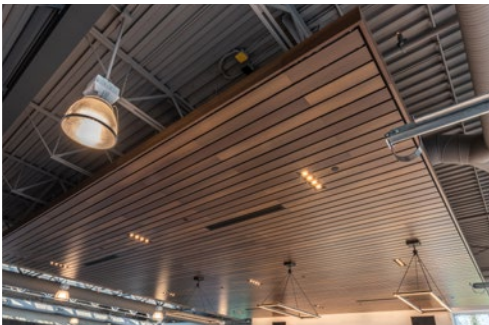


PARTITIONS ▶

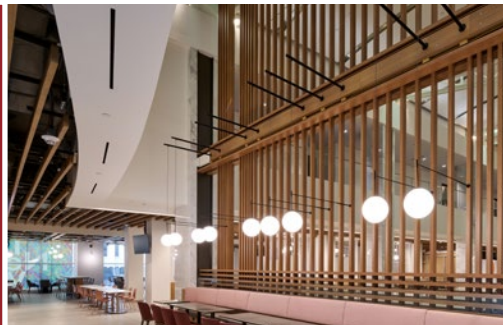

TRADITIONAL BAFFLES ▶
Extruded Metal



TRADITIONAL BAFFLES ▶
Fabricated Metal

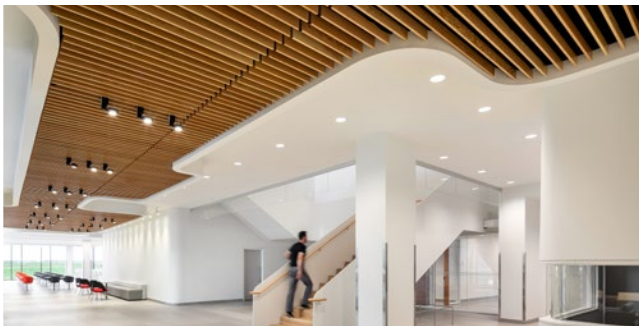


TRADITIONAL BAFFLES ▶
Felt, Blade



TRADITIONAL BAFFLES ▶
Felt, Profile



WALL FINIS ▶

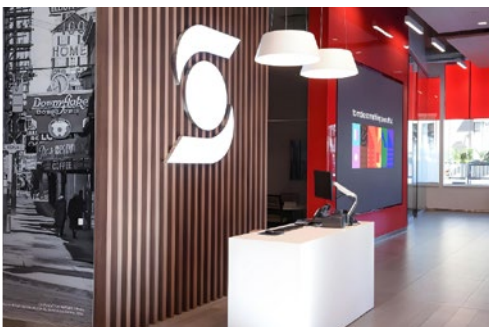


WAVE BAFFLES ▶



WHERE CREATIVE ENGINEERING MEETS ARCHITECTURAL VISION

At Maxxit, we combine creative engineering, advanced manufacturing, and close collaboration to help architects and designers bring bold ideas to life. From standard to custom solutions, we turn imagination into precision-built reality.

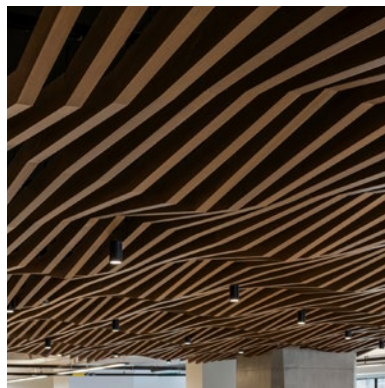

Co:LAB Studio

Our custom design service empowers architects and designers to realize unique visions through tailored solutions, material innovation, and expert collaboration — turning bold ideas into architectural realities.