LINE:Form™ | TRADITIONAL BAFFLES

MAIN ASSEMBLY

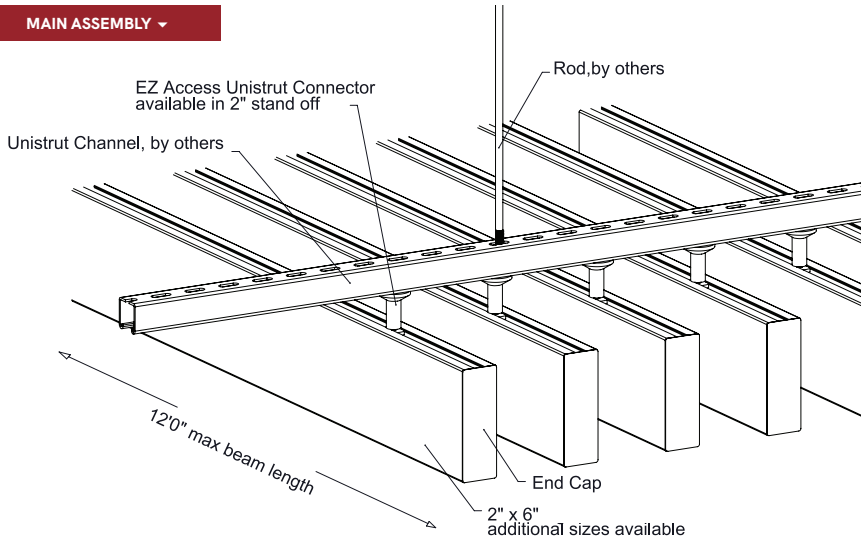

15/16" HD GRID & UNISTRUT ATTACHMENTS

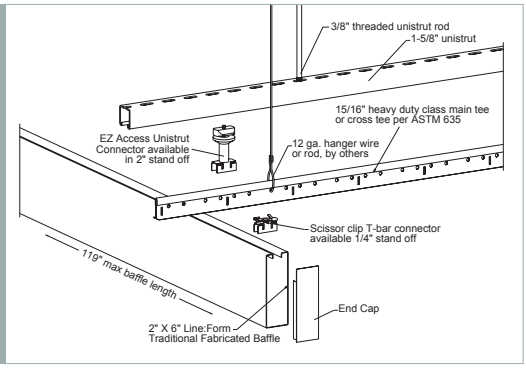

PHYSICAL DATA

- Material substrate – Aluminum | Fabricated
- Thickness .041″ - .060″ design dependent
- Fire Performance - Class A: Tested per ASTM E84. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.
- Weight – Varies from .67 – 1.10 lbs./ln.ft.
- Warranty – One Year Limited
- Surface Finish - Factory-applied polyester paint. Available in Standard Colors, Color Matched and Wood Look Powder-Coated.
- Seismic areas – Traditional Baffles haave been engineered for use in all seismic areas. Installations may require additional attachment from baffle to suspension bar. Check with local code officials or a licensed engineer for additional requirements.
- Acoustical Options - Perforated panels are supplied with acoustic infills to absorb sound - NRC values vary based on design and application.

SUSTAINABILITY

LEED CONTRIBUTION –

- LEED BD+C v4 (MR: Regional & Recycled Materials).
- Schools EQ: Acoustic Performance.
- ID+C EQ: Low-Emitting Materials.
- No VOCs.
- EPD available.
- Aluminum contains up to 80% recycled content.

LEED® is a registered trademark of the U.S. Green Building Council

FEATURES

- Create on trend linear designs.
- Unlimited finish options – custom colors, wood looks, films.
- Custom sizes & shapes – At Maxxit custom is what we do best. We will make any shape or size you can design.
- Standard sizes – in addition to custom we also have quick ship standard products available made to order.
  - Lengths - up to 12′
  - Depths - up to 15″
  - Widths - up to 24″
- Quick ship and expedited shipping.
- Available in acoustic perforated styles.
- Lightweight, pre-assembled & easy to install.
- Versatile attachment options for Unistrut® 15/16″ HD Grid and Cable hung applications.
- Easy plenum access – attachment hardware allows baffles to slide for easy plenum access and adjustment during installation.
- Cleanable using CDC recommended and EPA-approved disinfectants for fog, spray & wipe.
- Integrated lighting options available.

 © Maxxit Group Inc., 05/26 | All rights reserved

MAXXIT CEILINGS & WALLS

WOOD LOOK FINISHES

Standard Powder Coated Paint Finishes (Interior & Exterior) Formaldehyde-Free

National Walnut

Chestnut

Rosewood

European Cherry

Knotty Pine

Oak Fine

Maple

American Douglas

American Maple

Teak

Custom Colors

FIND YOUR PERFECT MATCH

At Maxxit we have a passion for finishes; wood, metallic, oil rubbed, whatever your challenge is we can match it!

Send us a color sample so we can quickly provide a color match.

Standard Laminated (Film) Finishes (Interior only). Formaldehyde-free

Canadian Oak

White Oak

American Natural

North Oak

European Walnut

Brazilian Walnut

Black Ash

STANDARD COLORS

Maxxit powder coat finishes offer superior chemical, scratch and UV resistance, they do not emit VOC's and are available in a broad range of textures, glosses and specialty looks.

Powder Coated Paint Finishes (Interior & Exterior) Formaldehyde-Free


Black
(25-35 Gloss)


White
(17-20 Gloss) | LRV 79-80


Chalkstone White
2-6 Gloss | LRV 85-86


Snow White
(25-30 Gloss) | LRV 83-84

Sterling Silver
(20 Gloss)

Sunrise Yellow
(20 Gloss)

Tan Straw
(20 Gloss)

Blush Rose
(20 Gloss)

Forest Green
(20 Gloss)

Grey
(65-75 Gloss)

Mid Beige
(20 Gloss)

Pure Orange
(20 Gloss)

Custom Colors

Custom colors available

Powder Coated, Bonded Metallic Finishes (Interior & Exterior) Formaldehyde-Free

Dark Bronze

Forged Charcoal

Gold

Golden Bronze

Metallic Sterling Silver

Soft Nickel

Blush Copper

MAXXIT
CEILINGS & WALLS

 © Maxxit Group Inc., 05/26 | All rights reserved

PERFORATIONS

Perforation patterns may be limited or not available for some product styles and designs. Perforation border size varies based on product style, size, and perforation pattern. For specific details, please reach out to your Maxxit representative.

Standard Perforations Angles – Staggered 60°



S02 Staggered
Diameter 0.063
Open area 4.5%
Centers 0.281



S03 Straight
Diameter 0.125
Open area 4.9%
Centers 0.5



S04 Staggered
Diameter 0.125
Open area 9.9%
Centers 0.379



S05 Staggered
Diameter 0.063
Open area 10.1%
Centers 0.188



S06 Straight
Diameter 0.125
Open area 19.6%
Centers 0.25

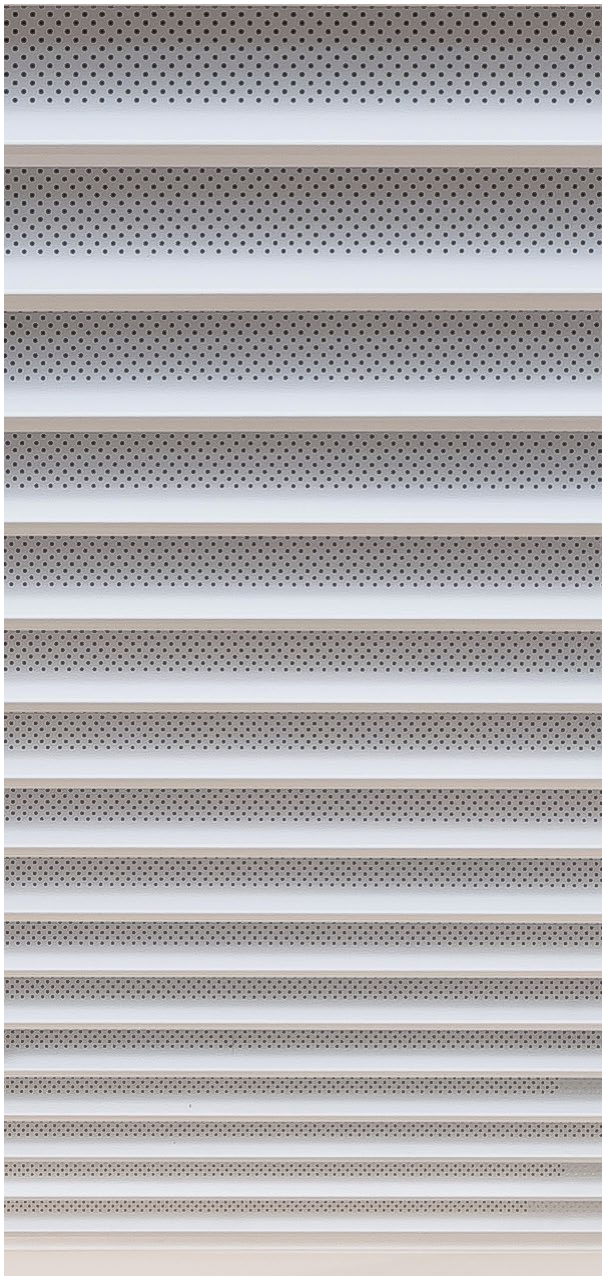

 © Maxxit Group Inc., 05/26 | All rights reserved

MAXXIT
CEILINGS & WALLS

LINE:Form™ DESIGNS

ELEVATIONS BAFFLES ▸
Felt



ANGLE BAFFLES ▸
Metal

ANGLE BAFFLES ▸
Felt, Profile

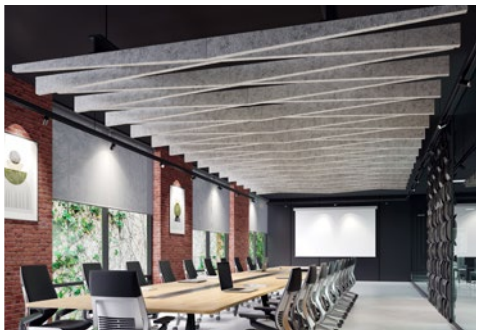

EXTERIOR WALL FINS ▸

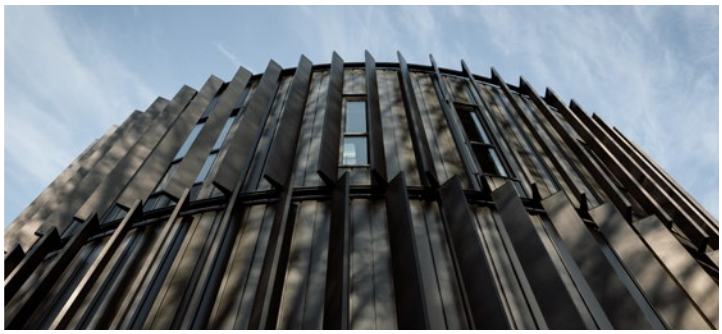

ELEVATIONS BAFFLES ▸
Metal

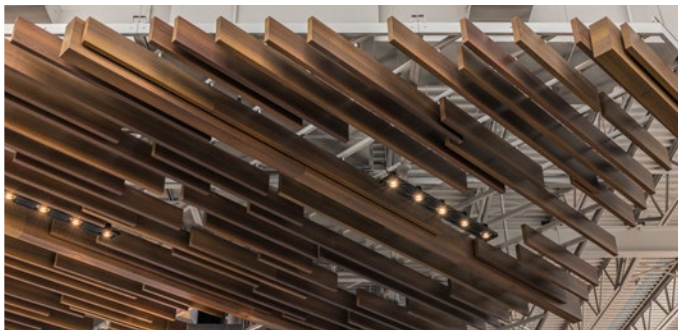

TRADITIONAL BAFFLES ▸
Extruded Metal

PARTITIONS ▸

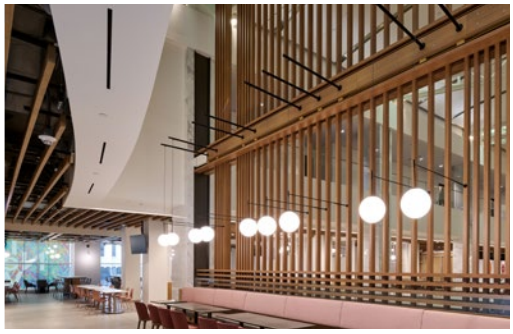

LINEAR PLANKS ▸

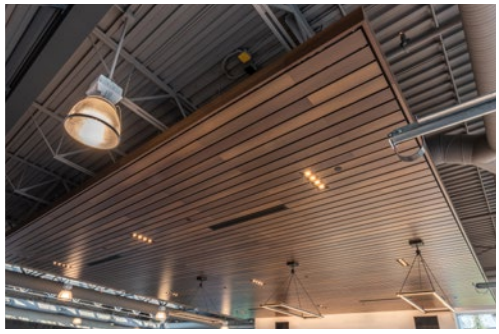

TRADITIONAL BAFFLES ▸
Felt, Profile

TRADITIONAL BAFFLES ▸
Felt, Blade

TRADITIONAL BAFFLES ▸
Fabricated Metal

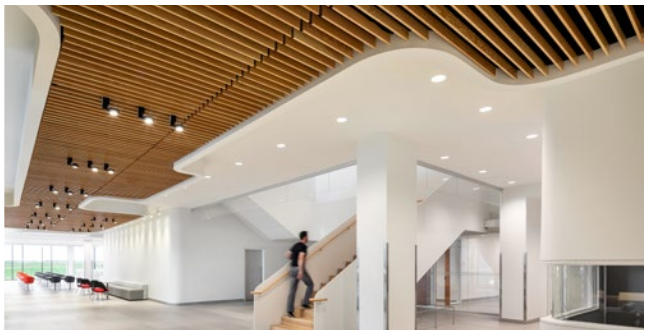

WAVE BAFFLES ▸

WALL FINS ▸

MAXXIT
CEILINGS & WALLS

 © Maxxit Group Inc., 05/26 | All rights reserved

WHERE CREATIVE ENGINEERING MEETS ARCHITECTURAL VISION

At Maxxit, we combine creative engineering, advanced manufacturing, and close collaboration to help architects and designers bring bold ideas to life. From standard to custom solutions, we turn imagination into precision-built reality.

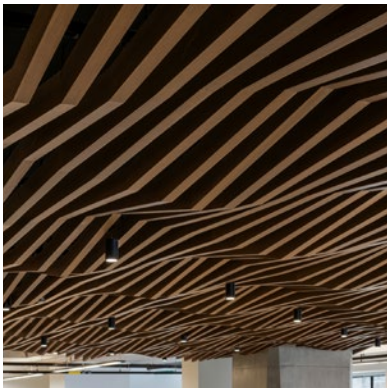

Co:LAB Studio

Our custom design service empowers architects and designers to realize unique visions through tailored solutions, material innovation, and expert collaboration — turning bold ideas into architectural realities.

MAXXIT
CEILINGS & WALLS

 © Maxxit Group Inc., 05/26 | All rights reserved