


AGILIS | BACKLIT PANELS



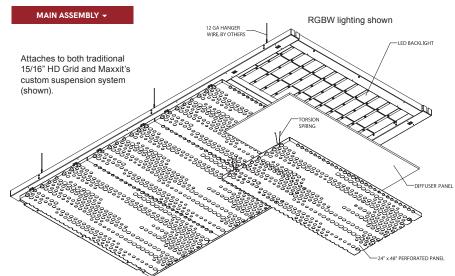





PHYSICAL DATA

- Material substrates Aluminum | Fabricated
- Thickness .041″ .060″ design dependent
- Fire Performance Class A: Tested per ASTM E84. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.
- Weight Varies from 1.0-1.5 lbs./sq.ft.
- Warranty One Year Limited
- Surface Finish Factory-applied polyester paint. Available in Standard Colors, Color Matched and Wood Look Powder-Coated and laminated
- Seismic areas Agilis has been engineered for use in all seismic areas. Installations may require additional attachment from baffle to suspension bar. Check with local code officials or a licensed engineer for additional requirements.

SUSTAINABILITY

CONTRIBUTES TO LEED® POINTS -

- LEED BD+C: New Construction v4
- MR: Regional Materials
- MR: Recycled Content
- LEED ID+C: Commercial Interiors v4
 EQ: Low-Emitting Material
- No VOC'S: No added urea-formaldehyde
- EPD 'Environmental Product Declaration'
- for raw material components
- Recycled Content up to 80%
- LEED® is a registered trademark of the U.S. Green Building Council

Physical data, Features and Sustainability on this page pertain to the Panels. Refer to the Lighting section for details on lighting.

FEATURES

- Create custom perforation patterns for elevated design
- Unlimited finish options custom colors, wood looks, and films
- Custom sizes & shapes At Maxxit custom is what we do best. We will make any shape or size you can design.
- Perforations run to the panel edge and are matched to adjacent panels for a more seamless appearance.
- Attaches to both traditional 15/16" HD Grid and Maxxit's custom suspension system (shown).
- Torsion spring design allows for easy access to light panel. Panels can remain hinged to suspension to avoid damage.
- Cleanable using CDC recommended and EPA-approved disinfectants for fog, spray & wipe
- Backlighting options include White and RGBW LED (see Lighting Specification page for details).
- Backlighting should not be relied upon as the primary lighting source. Linear lights can be integrated with backlit panels upon request.





METAL

PANEL SPECIFICATION


CEILING APPLICATION

Ceiling panels are designed to be mounted onto standard 15/16" HD Grid using torsion springs.

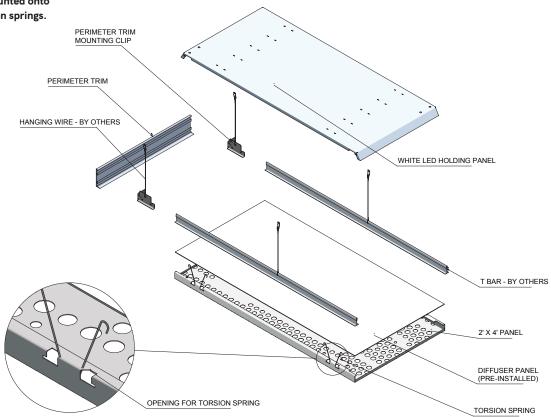

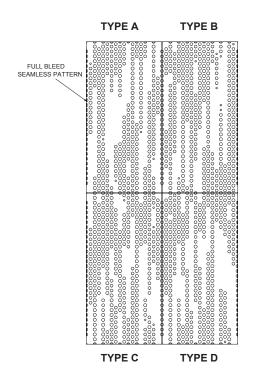


Perforated surface is crafted using four unique tiles arranged strategically to minimize visual repetition, creating a seamless look throughout the space. Ceiling panels have edge-to-edge perforations, subtly blending where each panel joins for a unified look.





PANEL SPECIFICATION

WALL APPLICATION

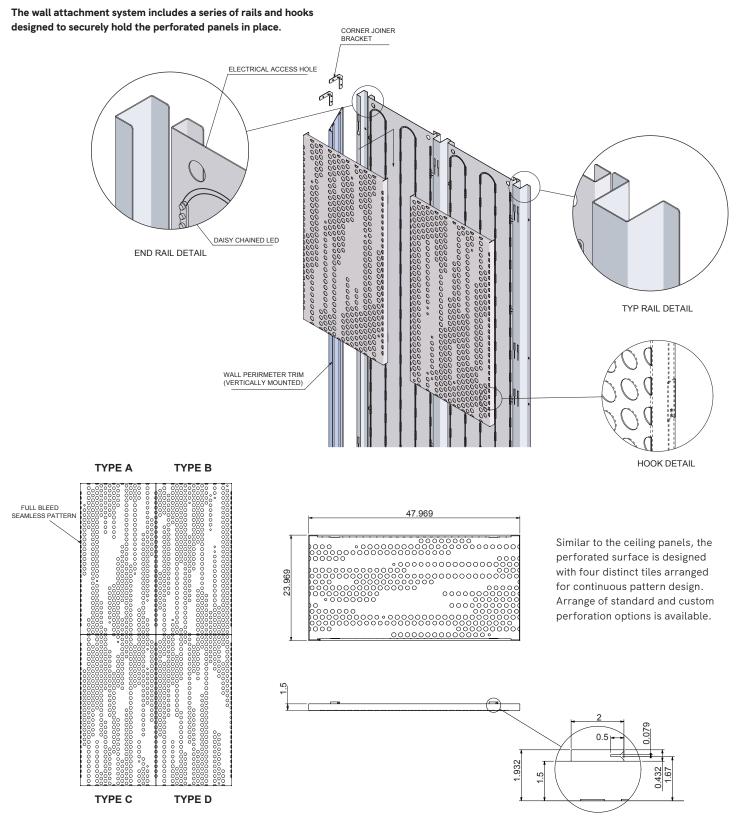



LIGHTING SPECIFICATION

The Maxxit Agilis back-lit panel system integrates LED lighting directly into its lightweight, perforated metal ceiling and wall panels, creating a sophisticated, seamless lighting solution. Designed with ease of installation in mind, the Agilis panels feature a modular system that allows for quick assembly and consistent illumination across large spaces. With customizable options for brightness, color temperature, and control systems, Agilis back-lit panels are ideal for commercial environments, offering both functional lighting and a high-end, modern look. Available in White and RGB versions.


AGILIS BACKLIGHTING SPECIFICATIONS										
PHYSICAL DATA	WHITE	RGBW								
TOTAL LUMENS	2000-2200 Lm / Panel	1800 Lm / Panel								
POWER CONSUMPTION	16 Watts / Panel	72 Watts / Panel								
VOLTAGE	24 Volt DC	24 Volt DC								
COLOR TEMP	3200K - 7100K	up to 6500 K (White) • Red • Green • Blue								
CRI	Up to 84	80+								
DIMMING OPTIONS	0-10V dimmable down to 1%; non-dimmable	DMX/RDM 0.1%-100%								
EFFICACFY	157 Lm / w	Varies depending on color temerature and wattage								
BEAM ANGLE	175°	117°								
SIZE (L X W X D)	48" x 24" x 2.75" (40 modules/120 LEDs per panel)	48" x 24" x 2.75" (12 bars/108 LEDs per panel)								
CERTIFICATIONS	Ul Recognized (C-US) #E219167, UL Classified (C-US) #E229508, CE, ROHS • IP66 rated: for dry, damp or wet location	UL Recognized Component, IP20								
OPERATING TEMPERATURE	-40°C to +60°C (-40°F to +140°F)	-20°C (-4°F) ~ +60°C (+140°F)								
POWER CABLE	E Plenum rated, 16AWG Supplied by installer									





LIGHTING SPECIFICATION

White Backlighting

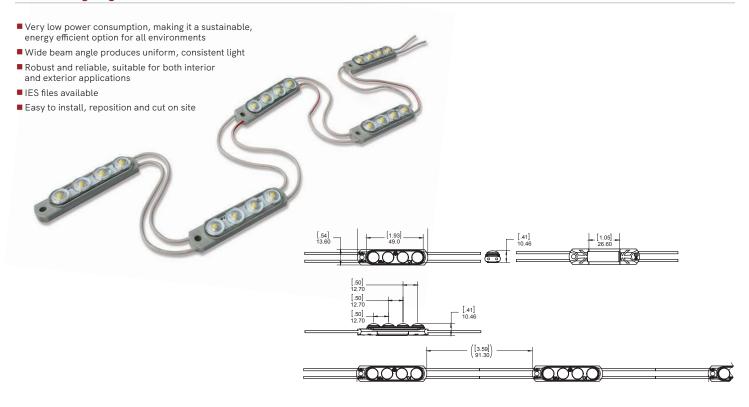

RGBW Backlighting

- A reliable RGBW 4-in-1 5050 LEDs with high performance
- Forward facing diodes for direct color lux and light uniformity
- Wide range of color options, include white (up to 6500K), red, green and blue
- Indoor use only




	000			900		900			100	000	
		800	8	e e e e e e e e e e e e e e e e e e e			a a a	a a a	8	900	e e e e e e e e e e e e e e e e e e e
									1 [
	.						0				
•	•	•	-	•	•		•	•	-	•	•
ôô	óó	óó	óó	ôô	òò	óó	óó	óó	ôô	ôô	óó
Bmsify	Questiy	Bmaily	Brostly	Bmsity	Breefy	Breefy	Brostly	Bracity	Brostly	Brushy	Brocky
9.00	666P	e	000 000	000 000	9100 600	000 000	e	0 n 660	900 000	9 <mark>66</mark> 9	e n 600
	<u>.</u>				_			B	-	8	
öö	ôô	åå	ôô	ôô	ôô	ôô	ôô	ôô	ôô	ôô	ôô
E ôô	п 66	п 60	л С	E ôô	п 66	п 66	п 66	п 60	D 66	п 60	п 66
	ôô		00	õõ	ôô	ôô			00	ôô	
100	=		-							-	-
	<u>,</u>		di 000	6	6		c ôô				
Bunky	anety 👴 🗖 🚛	Buoky 6	Bunity 8	dinn'r	Bundy	anoty 👴 🗆 📲	dinoity 6	Brooky 6	Buoity	Gunly .	Bunk
5			4	5			4	5			
(00)	0000 0000 0000 0000 0000 0000 0000 0000 0000		jõõ,	1		100	lici	dool	100 B	000 00 00 00	, Colo
	d.	п 00	n 00		d.	d d	e.	d d	d.	n	
80	00	8	8	200	8	00	8	8	60 8	8	8
P.3	P2		P3			~			21		
ln l			in l	Ini			Ini			l n l	
	4b	en e			e	4		4		doo h	đi p



WOOD LOOK FINISHES

Standard Powder Coated Paint Finishes (Interior & Exterior) Formaldehyde-Free

Custom Colors

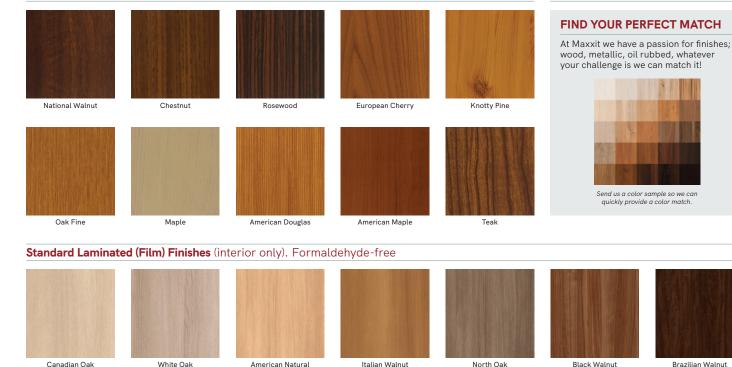

STANDARD COLORS

Maxxit powder coat finishes offer superior chemical, scratch and UV resistance, they do not emit VOC's and are available in a broad range of textures, glosses and specialty looks.





MAXXIT CEILINGS & WALLS


Grey (65-75 Gloss) Custom colors available

MADE TO ORDER PATTERNS

Custom Patterns Four distinct design families, each with customizable parameters. Whether it's adjusting hole diameter, pattern density, or scale, we can create virtually endless variations of each pattern to suit individual needs and preferences. Create your perfect design:

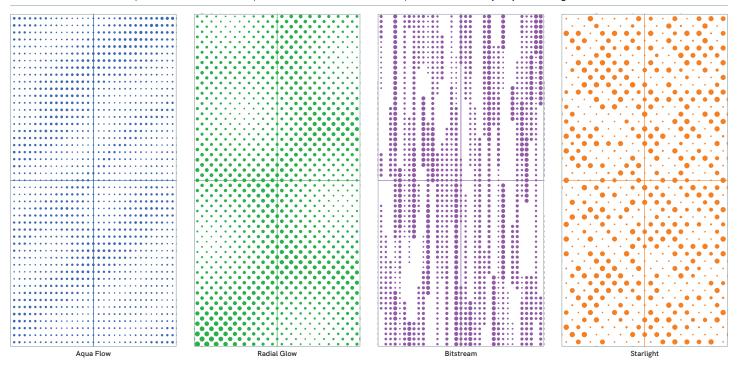




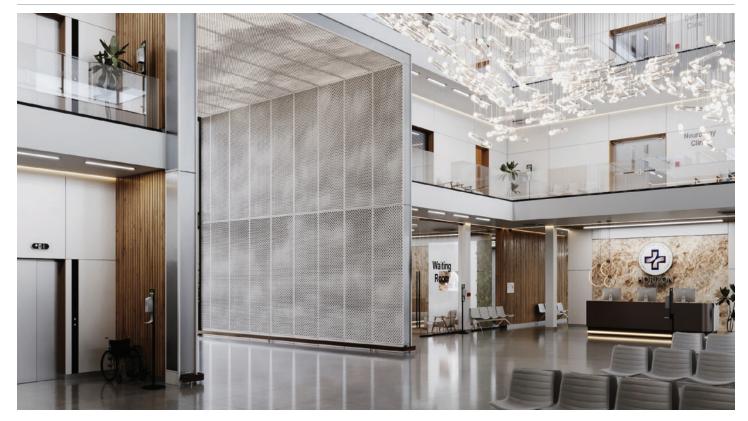



AGILIS DESIGNS

M

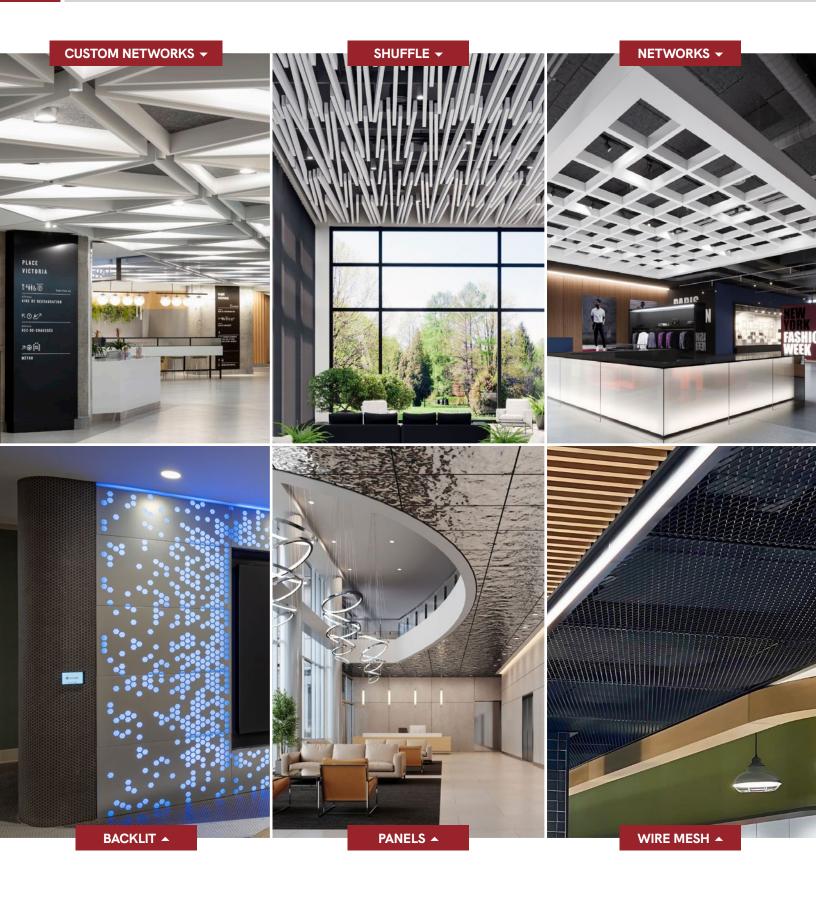



DESIGN REALIZED

From the familiar to the truly one of a kind, Maxxit brings your design vision to life. With ceilings and walls crafted from Wood, Felt, Metal, Composites & more there is no limit to what we can create together.















maxxitgroup.com | 855.762.9948 | © Maxxit Group Inc., 11/24 | All rights reserved